









For installation information please refer to the tooling overview and manuals on our website.  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Large flange	A collerette	Flachkopf	Flangiato	Ala ancha
Splined body	Fût cannelé	Gerändelter Schaft	Corpo zigrinato	Cuerpo estriado
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

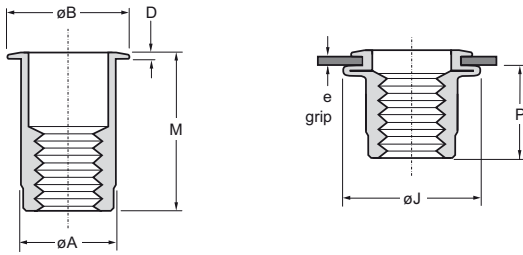

Thread filetage / Gewinde / filetto / rosca	e (grip)		 +.006/-0	øA max.	øB ±.010	D ±.003	øJ max.	M ±.015	P max.	Part No/ref
	min.	max.								
6-32 UNC	.020	.080	.2656	.265	.390	.390	.390	.305	.420	DLS-632-80
	.080	.130								
8-32 UNC	.020	.080	.2969	.296	.415	.030	.450	.315	.420	DLS-832-80
	.080	.130								
10-24 UNC	.020	.130	.3906	.390	.500	.035	.740	.380	.475	DLS-1024-130
	.130	.225								
10-32 UNF	.020	.130	.5312	.530	.685	.035	.740	.470	.475	DLS-1032-130
	.130	.225								
1/4-20 UNC	.027	.165	.5312	.530	.685	.035	.740	.470	.580	DLS-420-165
	.165	.260								
1/4-28 UNF	.027	.165	.5312	.530	.685	.035	.740	.470	.580	DLS-428-165
	.165	.260								
5/16-18 UNC	.027	.150	.5312	.530	.685	.035	.740	.470	.690	DLS-518-150
	.150	.312								
5/16-24 UNF	.027	.150	.5312	.530	.685	.035	.740	.470	.690	DLS-524-150
	.150	.312								
3/8-16 UNC	.027	.150	.5312	.530	.685	.035	.740	.470	.690	DLS-616-150
	.150	.312								
3/8-24 UNF	.027	.150	.5312	.530	.685	.035	.740	.470	.690	DLS-624-150
	.150	.312								

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque lbf-in	 Pull-out lbf	 Torque-to-turn lbf-in	 Push-out lbf
6-32 UNC	47	520	10	180
8-32 UNC	65			
10-24 UNC	95	630	12	335
10-32 UNF				
1/4-20 UNC	235	685	24	320
1/4-28 UNF	N/A	1115		
5/16-18 UNC				
5/16-24 UNF				
3/8-16 UNC				
3/8-24 UNF				