




For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

| English | Français | Deutsch | Italiano | Español |
|----------------------------|-------------------------------|----------------------------|---|---------------------------|
| Large flange | A collerette | Flachkopf | Flangiato | Ala ancha |
| Hexagonal body | Hexagonal corps | Hexagonaler Schaft | Hexagonal corpo | Hexagonal cuerpo |
| Closed end | Borgne | Geschlossen | Fondo cieco | Fondo cerrado |
| Low carbon steel* | Acier bas carbone* | Stahl* | Acciaio a basso tenore di carbonio* | Acero bajo en carbono* |
| Zinc plated | Revêtement zingué | Verzinkt | carbonio* | Zincado |
| Clear trivalent passivated | Passivation claire trivalente | Klar chromatiert, Cr6-frei | Zincato, Passivazione chiara trivalente | Pasivado claro trivalente |

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

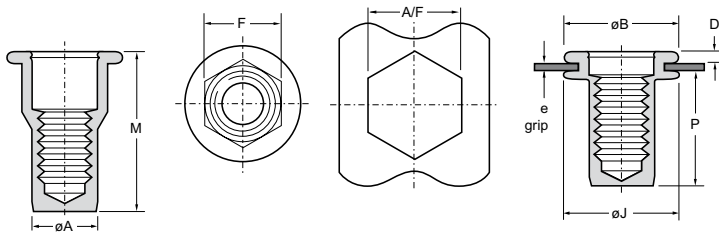

| Thread filetage / Gewinde / filetto / rosca | A/F rec. | | e (grip) | | øA | øB | D | F | øJ | M | P | Part No/ref |
|--|----------|-------|----------|------|--------|-------|--------|--------|-------|--------|-------|-------------|
| | min. | max. | min. | max. | ± 0.08 | max. | ± 0.13 | ± 0.08 | max. | ± 0.50 | max. | |
| M6 x 1.0 | 9.00 | 9.10 | 0.50 | 3.00 | 8.89 | 13.20 | 1.50 | 8.89 | 13.40 | 27.30 | 17.80 | 49141-76030 |
| M8 x 1.25 | 11.00 | 11.10 | 0.50 | 3.00 | 10.89 | 16.28 | 1.50 | 10.89 | 16.20 | 28.00 | 20.10 | 49141-78030 |

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

| Thread filetage / Gewinde / filetto / rosca | TORQUE APPLIED PLATE HELD STATIONARY RELATIVE TO INSERT | PULL-OUT SUPPORT | TORQUE TO TURN SPACER | PUSH-OUT SUPPORT |
|--|---|---------------------|--------------------------|---------------------|
| | Recommended max. torque Nm max. | kN | Nm min. | kN |
| M6 x 1.0 | 12.4 | 14.4 | 11.9 | 5.3 |
| M8 x 1.25 | 32.0 | 15.0 | 25.0 | 8.0 |