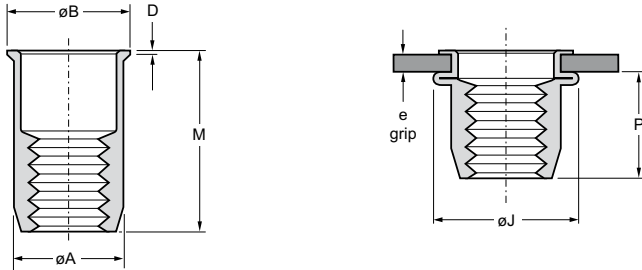





For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.





English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Aluminium alloy* (2.5 % Mg)	Alliage d'aluminium* (2.5% Mg)	Aluminium* (2.5 % Mg)	Lega di alluminio* (2.5% Mg)	Aluminio* (2.5% Mg)
Natural	Brut	Blank	Nessuna finitura	Natural

* : AA 5052, DIN 1725, AlMg2.5, Werkstoff 3.3523



Thread filetage / Gewinde / filetto / rosca	e (grip)		 +0.1/-0	øA max.	øB +0.3/-0.2	D +0.3/-0.1	øJ max.	M ± 0.35	P max.	Part No/ref
	min.	max.								
M4 x 0.7	0.50	3.00	6.10	6.00	6.50	0.50	8.10	10.75	6.80	OGM17-00430
M5 x 0.8	0.50	3.00	7.10	7.00	7.50	0.50	9.60	12.00	8.30	OGM17-00530
M6 x 1.0	0.50	3.00	9.10	9.00	9.50	0.50	12.10	14.50	10.00	OGM17-00630
M8 x 1.25	0.50	3.00	11.10	11.00	11.50	0.50	14.50	16.00	11.50	OGM17-00830

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	 Recommended max. torque Nm max.	 Pull-out kN	 Torque-to-turn Nm min.	 Push-out kN
	M4 x 0.7	4.0	3.7	1.6
M5 x 0.8	5.3	5.4	2.1	0.8
M6 x 1.0	10.8	8.5	2.4	0.9
M8 x 1.25	23.0	13.1	5.4	1.0