

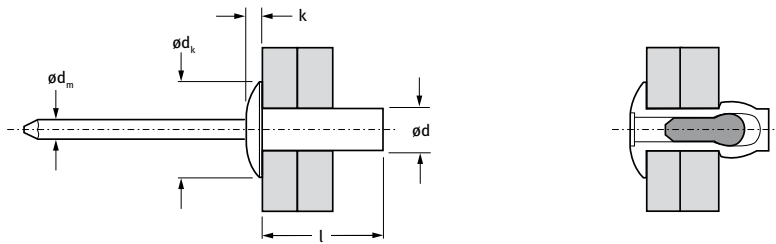






For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy*	Corps: Alliage d'aluminium*	Hülse: Aluminium*	Corpo: Lega di alluminio*	Cuerpo: Aluminio*
Polished	Poli	Blank	Lucido	Pulido
Stem: Stainless steel**	Tige: Inox**	Dorn: Edelstahl**	Gambo: Acciaio inox**	Vástago: Acero inoxidable**
Polished	Poli	Blank	Lucido	pulido

*: AlMg5

** : A2



\varnothing nom.				$\varnothing d$ ± 0.08	l $+1.0$ -0.2	$\varnothing d_k$	k max.	$\varnothing d_m$	 kN	 kN	Part No/ref
	min.	max.									
3.2 (1/8")	0.5	2.0	3.3	3.2	6.5	6.0 [± 0.24]	1.4	1.7	1.07	1.25	OSR02-03265
	2.0	3.5			8.0						OSR02-03280
	3.5	5.0			9.5						OSR02-03295
	5.0	6.5			11.0						OSR02-03211
	6.5	8.0			12.7						OSR02-03212
4.0 (5/32")	0.5	3.5	4.1	4.0	8.0	8.0 [± 0.29]	1.7	2.18	1.70	2.24	OSR02-04080
	3.5	4.5			9.5						OSR02-04095
	4.5	6.5			11.0						OSR02-04011
	6.5	8.0			12.7						OSR02-04012
4.8 (3/16")	1.0	3.0	4.9	4.8	8.0	9.5 [± 0.29]	2.0	2.63	2.20	3.10	OSR02-04880
	3.0	4.5			9.5						OSR02-04895
	4.5	6.0			11.0						OSR02-04811
	6.0	7.5			12.5						OSR02-04812
	7.5	9.0			14.0						OSR02-04814
	9.0	11.0			16.0						OSR02-04816
	11.0	13.0			18.0						OSR02-04818
	13.0	16.0			21.0						OSR02-04821

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros