





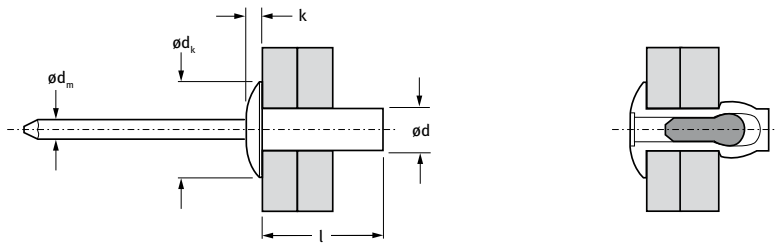


For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* Polished	Corps: Alliage d'aluminium* Poli	Hülse: Aluminium* Blank	Corpo: Lega di alluminio* Lucido	Cuerpo: Aluminio* Pulido
Stem: Aluminium alloy Polished	Tige: Alliage d'aluminium Poli	Dorn: Aluminium Blank	Gambo: Lega di alluminio Lucido	Vástago: Aluminio Pulido

*: Al99,5



ø nom.				ød ±0.08	l +1.0 -0.2	ød _k	k max.	ød _m	 kN	 kN	Part No/ref
	min.	max.									
3.2 (1/8")	0.5	3.5	3.3	3.2	8.0	6.0 [±0.24]	1.4	1.8	0.45	0.49	OSR04-03280
	3.5	5.5									9.5
4.0 (5/32")	0.5	5.0	4.1	4.0	9.5	8.0 [±0.29]	1.7	2.2	0.58	0.82	OSR04-04095
	5.0	8.0			12.5						OSR04-04012
4.8 (3/16")	1.0	4.5	4.9	4.8	9.5	9.5 [±0.29]	2.0	2.65	0.90	1.12	OSR04-04895
	4.5	6.5			11.5						OSR04-04811
	6.5	9.5			14.5						OSR04-04814
	9.5	13.0			18.0						OSR04-04818

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros